


# IR FIXED LENS DOME CAMERA

DI-330IPS36

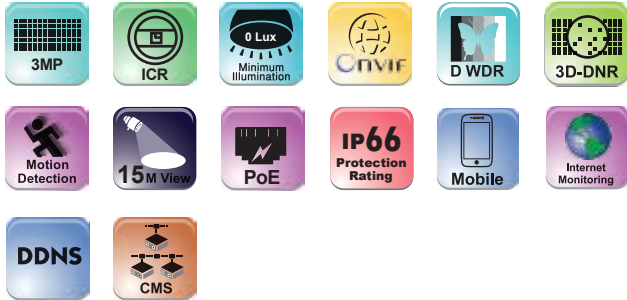

1/3" CMOS Sensor  
3 Mega-Pixel  
True Day & Night (IR Cut Removable)  
0 Lux (IR On) Min. Illumination  
ONVIF

Digital WDR  
3D Noise Reduction  
Motion Detection and Privacy Masking  
3.6mm Mega-Pixel Lens  
15m IR Illumination

PoE Support  
IP 66 Protection

## Specifications

Camera	Video	Model	DI -330IPS36
		Image Sensor	1/3" CMOS
		Effective Pixels	2048x1536
		Electronic Shutter	1/25s ~ 1/100000s
		Frame Rate	1-25/30FPS
		Day & Night	ICR
		Min. Illumination	0lux (IR ON)
	Audio	Audio compression	No
		Communication	No
	Image Enhancement	Image Settings	AWB, AGC Adjustable Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
		Image Enhancement	Digital WDR, ROI
		Noise Reduction	3D-DNR
		Image Orientation	Mirror/Flip
		Privacy Zone	Yes
Motion Detection		Yes	
Compression	Video Compression	H.264	
	Resolution	3MP (2048x1536), 1080P (1920x1080), 720P (1280x720), D1, CIF	
	Multi-stream	2048x1536 (1~30fps) / 1920x1080 (1~30fps) / 1280x720 (1~30fps) D1 (1~30fps) / HD1 (480x240) CIF (1~30fps)	
	Bit rate	64Kbps ~ 10Mbps	
	Encode Mode	VBR/CBR	
	Image Quality	Five levels under VBR; Free adjustment under CBR	

Housing	IR Distance	15m (2 High Power IR LED)
	Lens	3.6mm
	Iris	Fixed Iris
	Lens Mount	Φ14 mount
	Protection Rate	Water Proof: IP66
	Bracket	3-Axis Wall Bracket
	Dimensions	Ø107mm×95mm
Connectivity	Weight(gross)	400g
	Network	RJ45 (+PoE)
	Power	DC Socket
	Analog Video Output	No
	Mic Connectivity	No
	SD Card	No
	RS485	No
Network	Alarm	No
	Remote Monitoring	IE Browsing, CMS Software, Provision Cam2 Mobile App
	User Access	Supports simultaneous monitoring for up to 4 users with multi-stream real time transmission
	Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
	ONVIF	Yes
	Ethernet	100Mbps
Others	PoE	Yes
	Power Supply	DC12V/-280mA / PoE/-4W
	Work Environment	-30 C~50 C, 10%~90% Humidity

